



Portable Surface Roughness Tester
Surftest SJ-410 Series


Form Measurement



Portable Surface Roughness Tester

Surftest SJ-410 Series

Analysis functions that are a notch above the usual

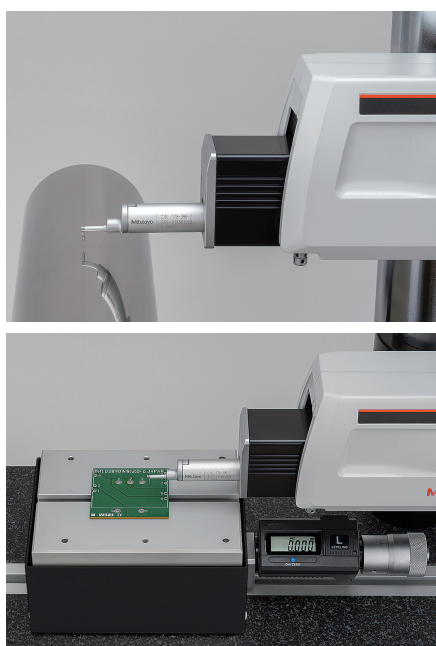

**User
benefit**


1

Easy and safe
measurements that
anyone can perform
efficiently

**User
benefit**

2

Higher level
of quality control

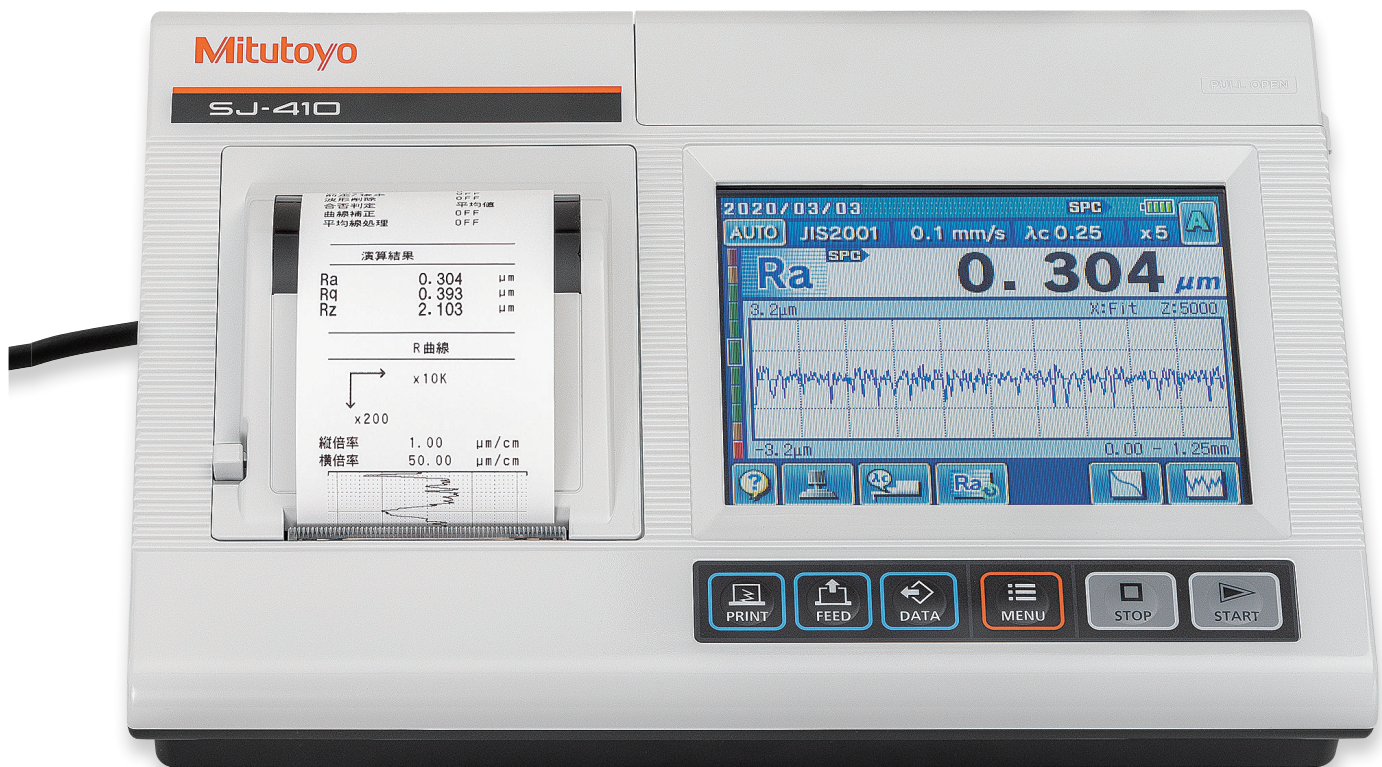

Touch screen for easier operations

The high-visibility color-graphic LCD touch screen clearly displays calculated results and assessed profiles. A backlight enables comfortable viewing even under poor lighting conditions.

User benefit 3

Doing double duty for space saving




SJ-411
Traverse range 25 mm


User benefit 1

Easy and safe measurements that anyone can perform efficiently

The auto-set unit* enables measurements to be made with a single button push, saving you time and increasing work efficiency.

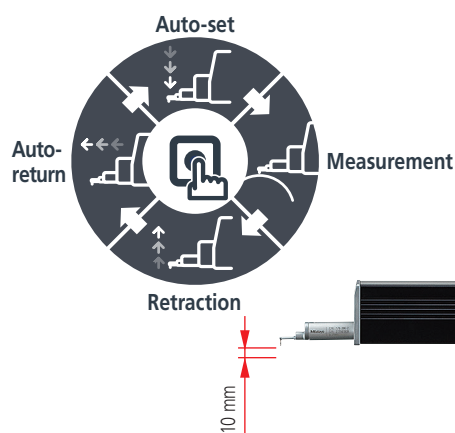

Optional stand shown (178-039) is required to use the Auto-set unit.

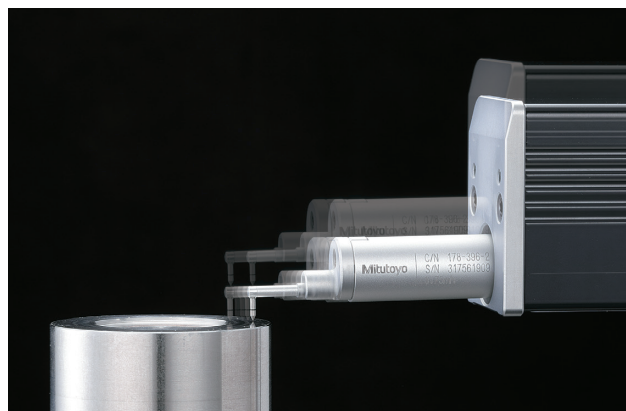

The auto-set function safely controls descent of the detector, eliminating the possibility of operator error causing damage to the stylus.

Auto-set unit*

178-010


This unit automatically completes a full measurement cycle of stylus contact, measurement, stylus retraction and detector auto-return from just one button push (stylus retraction and detector auto-return can be switched on and off by operating the drive unit).



Options for SJ-410 Series

X-axis adjustment unit* 178-020

This unit helps fine-tune the horizontal (X axis) direction.

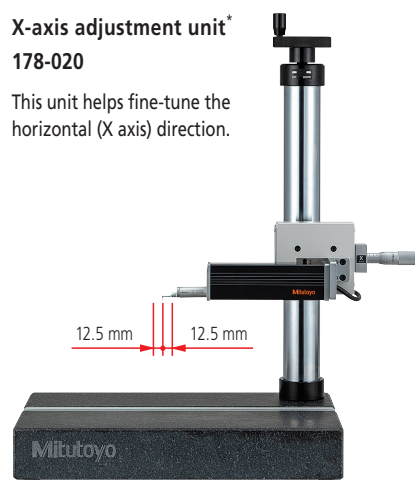


Tilting adjustment unit* 178-030

This unit is used for aligning the workpiece surface with the detector reference plane. It supports the DAT function to make the leveling of workpiece surfaces easier.




Complete set*

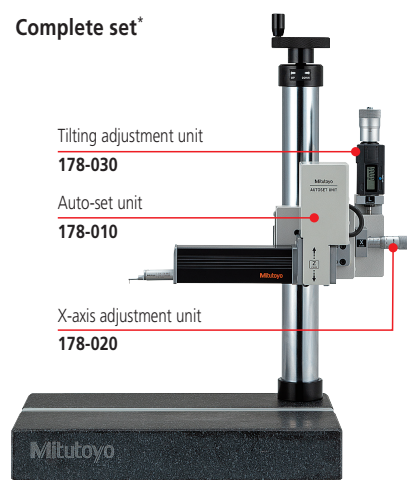

* This is an optional accessory for the SJ-410 Series. It can only be used on the simple column stand (optional accessory, Code No. 178-039). When the units are used in combination, straightness for SJ-411/412 drive unit will be degraded about 0.2 μm. Cannot be used when the tester's main unit is an older model (SJ-401/402).


Assessing a single measurement result under two different evaluation conditions

A single measurement enables simultaneous analysis under two different evaluation conditions. A single measurement allows calculation of parameters and analysis of filtered profiles without the need for recalculation after saving data, contributing to higher work efficiency.

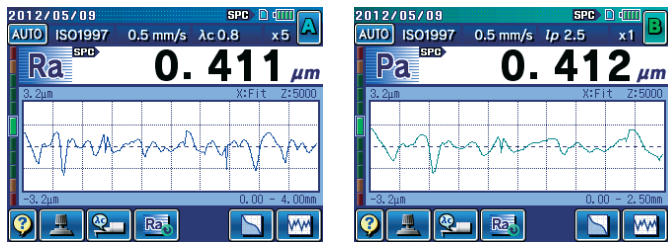

3-axis Adjustment Table <Option> 178-182

This table helps make the alignment adjustments required when measuring cylindrical surfaces. The corrections for the pitch angle and the swivel angle are determined from a preliminary measurement and the Digimatic micrometers are adjusted accordingly. A flat-surfaced workpiece can also be leveled with this table.


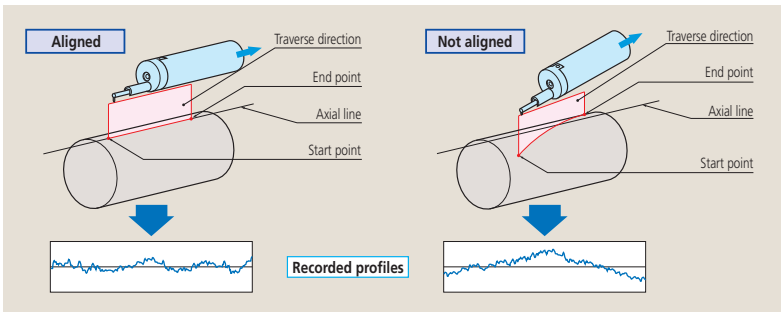


DAT Function for the leveling table <Option>

The levelling table can be used to align the surface to be tested with the detector reference plane. The operator is guided through the procedure by screen prompts.


178-196

Inclination adjustment angle: $\pm 1.5^\circ$
Table dimensions: 130x100 mm
Maximum load: 15 kg

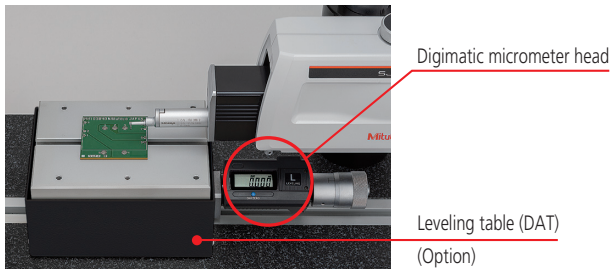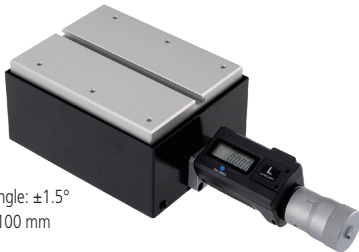

Powerful support for leveling

The height/tilt adjustment unit comes as standard for leveling the drive unit prior to making skidless measurements and, supported by guidance from the unique DAT function, makes it easy to achieve highly accurate alignment.

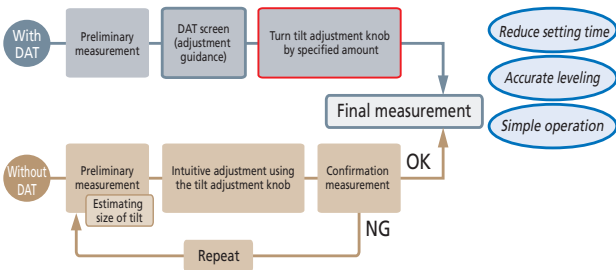

Simple column stand for SJ-410 Series <Option>

178-039

Vertical adjustment range: 250 mm
Dimensions: 400x250x578 mm
Mass: 20 kg



Combining (adjustment guidance)

User benefit 2

Anyone can easily perform high-level data collection.

Higher level of quality control
Wireless communication and advanced analysis



Wireless and quick capture of measurement results on a PC. No more handwriting, and also easy data input with a single touch <Option>

Wireless Input Tool
U-WAVE

This unit allows you to remotely load Surftest SJ-410 calculation results (SPC output) into commercial spreadsheet software on a PC. You can essentially use a one-touch operation to enter the calculation results (values) into the cells in the spreadsheet software.



U-WAVE-R (Connects to the PC)
02AZD810D



U-WAVE-T* (Connects to the SJ-410)
02AZD880G
* Requires the optional Surftest SJ-410 connection cable.
02AZD790D

One-touch Input
USB Input Tool

This unit allows you to load Surftest SJ-410 calculation results (SPC output) into commercial spreadsheet software on a PC via a USB connector. You can essentially use a one-touch operation to enter the calculation results (values) into the cells in the spreadsheet software.



USB Input Tool Direct
USB-ITN-D
06AFM380D





USB keyboard signal conversion type*
IT-020U
264-020
* Requires the optional Surftest SJ-410 connection cable.
1 m: 936937
2 m: 965014

More advanced analysis with optional software. Also, easy creation of inspection record tables by transferring data to Excel

For SURFTEST SJ-410 Series

Simplified Communication Program (Free software)

The SurfTest SJ-410 Series has a USB interface, enabling setting up of measurement conditions and starting the measurement via PC. We also provide a program that lets you create inspection record tables using a Microsoft Excel® macro.

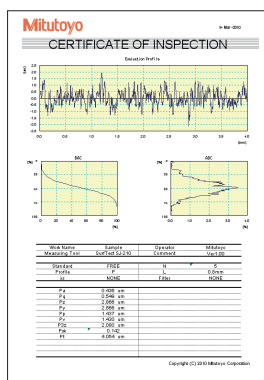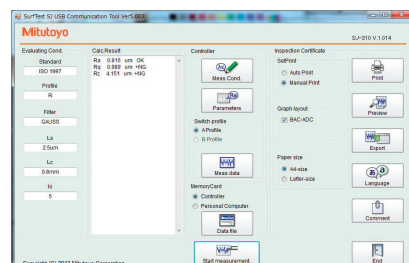

This program can be downloaded free of charge from the Mitutoyo website.
<https://www.mitutoyo.co.jp/eng/>

Required environment*

- OS: Windows 7, Windows 8, Windows 10
- Spreadsheet software: Microsoft Excel 2010, Microsoft Excel 2013, Microsoft Excel 2016

* Windows OS and Microsoft Excel are products of Microsoft Corporation.

The optional USB cable is also required.

USB cable for SJ-410 Series 12AAD510

Contour/Roughness analysis software

FORMTRACEPAK-AP

More advanced analysis can be performed by loading SJ-410 Series measurement data to software program FORMTRACEPAK-AP via a memory card (option) for processing back at base.

Higher accuracy measurements with selectable drive unit

A wide range, high-resolution detector

■ Detector

Measuring range/resolution:

800 μm /0.01 μm

80 μm /0.001 μm

8 μm /0.0001 μm

High straightness drive unit

■ Drive unit

Straightness/traverse length:

0.3 μm /25 mm (SJ-411)


0.5 μm /50 mm (SJ-412)



Extending measurement to narrow features


Surface roughness measurement requires a run-up distance before starting the measurement (or retrieving data). When the SJ-410 Series measures, its run-up distance is normally set to 0.5 mm. However, this distance can be shortened to 0.15 mm using the narrow-part measurement function. This function extends the measurement of narrow locations to features such as piston-ring grooves and O-ring grooves.

Typical applications

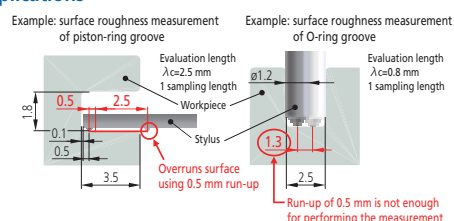

Easily measures R-surface roughness (skidless measurement)

Usually, a spherical or cylindrical surface (R-surface) cannot be evaluated, but, by removing the radius with a filter, R-surface data is processed as if taken from a flat surface. Other curved surfaces can be processed besides cylindrical, such as parabolical and ellipsoidal.

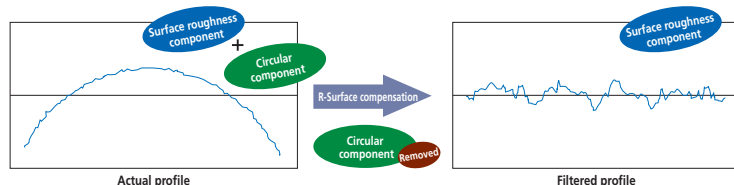

User benefit 3


Doing double duty
for space saving
Surface Roughness/Fine Contour

Supporting not only surface roughness measurement but also contour (fine contour) measurement




Simple contour analysis function


Point group data collected for surface roughness evaluation is used to perform simplified contour analysis (step, step height, area and coordinate difference). It assesses minute forms that cannot be assessed by a regular contour measuring machine.

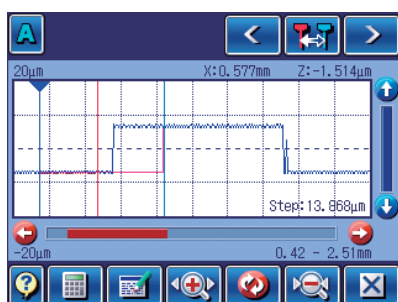

Step

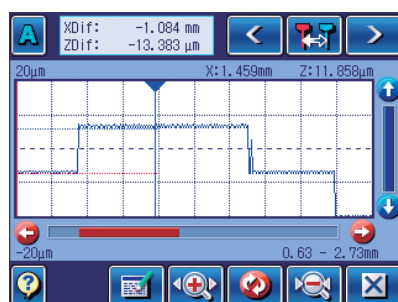

Coordinate difference

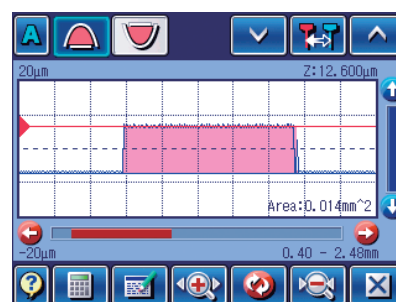


Area


Your choice of skidless or skidded measurement

Skidless measurement

Skidless measurement is where surface features are measured relative to the drive unit reference surface. This measures waviness and finely stepped features accurately, in addition to surface roughness, but range is limited to the stylus travel available.

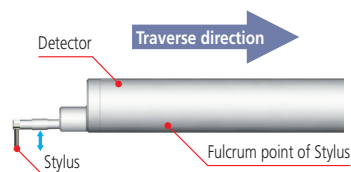

Measuring example of stepped features: Skidless




Measured profile




Skidded measurement

In skidded measurements, surface features are measured with reference to a skid following close behind the stylus. This cannot measure waviness and stepped features exactly but the range of movement within which measurement can be made is greater because the skid tracks the workpiece surface contour.

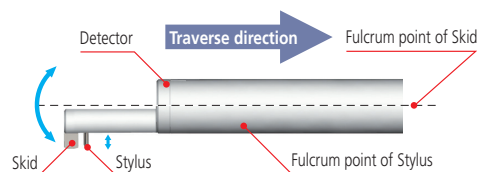

Measuring example of stepped features: Skidded




Measured profile




Easy to use and highly functional

This portable surface roughness tester is equipped with analysis functionality rivaling that of benchtop surface roughness testers.

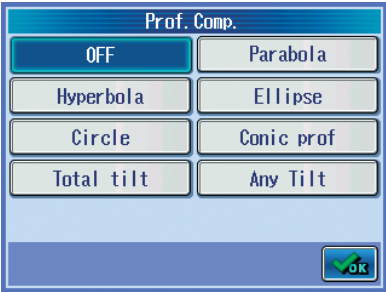

Data compensation

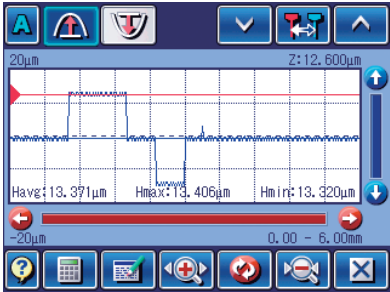

Simple contour analysis function

Equipped with externally controllable interfaces as standard

A variety of interfaces supplied as standard

The external device interfaces that come as standard include USB, RS-232C, SPC output and foot switch I/F.



Data storage

Memory card (optional) is supported

The measurement conditions and data can be stored in a memory card (optional) and recalled as required. This enables batch analysis and printout of data after on-site measurement.




- Measurement condition
Internal memory: 10 sets
Memory card: 500 sets
- Measurement result
Memory card: 10000 sets

High-speed thermal printer built in

High-speed printer prints out measurement results on site

A high-quality, high-speed thermal printer prints out measurement results.

It can also print a BAC curve or an ADC curve as well as calculated results and assessed profiles. These results and profiles are printed out in landscape format, just as they appear on the color-graphic LCD.

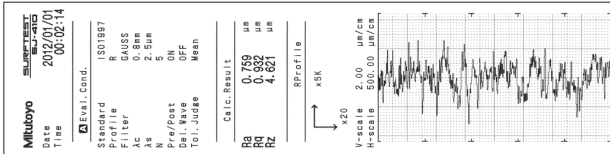

Equipped with convenient carrying case as standard

The unit is easily transported in a dedicated carrying case which includes holders for the accessories as well as the tester itself. (Standard accessory)





Other Optional Accessories


XY leveling tables

The tester includes X- and Y-axes micrometer heads. This makes axis alignment much easier because the tilt adjustment center is the same as the rotation center of the table.

(Code No.178-185/178-183)



178-185




178-183

Code No.	178-185 (mm) 178-186 (inch) with digital heads	178-183 (mm) 178-184 (inch) with analog heads	178-198 (mm) 178-197 (inch/mm) with digital heads
Items			
Table dimensions	130x100 mm		
Maximum load	15 kg		
Inclination adjustment angle	±1.5°		
Swiveling angle	±3°		
X/Y-axis travel range	±12.5 mm	±12.5 mm	±12.5 mm
Resolution	0.001 mm	0.01 mm	0.001 mm
Dimensions (WxDxH)	262x233x83 mm	220x189x83 mm	262x233x55 mm
Mass	6.3 kg	6 kg	5 kg


Precision vise

Fits on the table.



Code No.	178-019
Clamping method	Sliding jaws
Jaw opening	36 mm
Jaw width	44 mm
Jaw depth	16 mm
Height	38 mm

Roughness specimen W



Display: Ra = Approx. 3 μm,
Approx. 0.4 μm

178-604

Note: Ra = Approx. 0.4 μm can only be used for stylus tip checking.

Cylinder attachment

This block can be positioned on top of cylindrical objects to perform measurements.

12AAB358

Diameter: ø15 to 60 mm

Configuration

- Cylindrical measurement block
- Auxiliary block
- Clamp



Reference step specimen

Used to calibrate detector sensitivity.

178-611

Step nominal values: 2 μm/10 μm




Optional accessories, consumables, and others for SJ-410

• Printer paper (5 rolls)	270732
• Durable printer paper (5 rolls)	12AAA876
• Touch-screen protector sheet (10 sheets)	12AAN040
• Memory card * (2 GB)	12AAW452
• Connecting cable (for RS-232C)	12AAA882
• Foot switch	12AAJ088

* micro SD card (with a conversion adapter to SD card)

Vibration Isolator (Air cushion type)

Vibration isolator for simple column stand for SJ-410 Series (178-039).

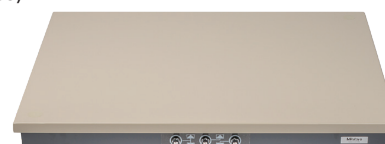

178-093-1

Note: No pump is supplied. An American-valve-compatible hand pump is required.

Enhanced standard functions

Sheet buttons

Single button measurements

A sturdy sheet-button panel with superior durability in any environment is provided. For repeat measurement of the same work, simply pressing the start switch can complete measurement, analysis and printout.




Recalculating

Previously measured data can be recalculated for use in other evaluations by changing the current standard, assessed profile and roughness parameters.

Note: Some conditions are limited.

GO / NG judgement function

An "GO/NG" judgment symbol is displayed when limits are set for the roughness parameter. In case of "NG," the calculated result is highlighted. The calculated result can also be printed out.



Calc. Result		
Ra	↑ 1.103	μm
Rq	OK 1.427	μm
Rz	↓ 7.259	μm

The "OK" symbol means the measurement is within the limits set; "NG" means it is not, in which case an arrow points to either the upper or lower limit in the printout.

Multilingual support

The display interface supports 16 languages.

(Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Chinese (simplified/traditional), Czech, Polish, Hungarian, Turkish, Swedish, Dutch)

Password protection

Access to functions can be restricted by a password

A pre-registered password can limit use of measurement conditions and other settings to the tester's administrator.

Arbitrary sampling length setting

This function allows a sampling length to be arbitrarily set in 0.01 mm increments (SJ-411: 0.1 mm to 25 mm, SJ-412: 0.1 mm to 50 mm). It also allows the SJ-410 Series to make both narrow and wide range measurements.

Applicable standards

Complies with many industry standards

The Surftest SJ-410 complies with the following standards: JIS (JIS-B0601-2001, JIS-B0601-1994, JIS B0601-1982), VDA, ISO-1997, and ANSI.



2024/10/10 14:37:14

Specifications

Model No.		SJ-411		SJ-412	
Code No.	mm	178-580-11	178-580-12	178-582-11	178-582-12
	inch/mm	178-581-11	178-581-12	178-583-11	178-583-12
Measuring range	X axis	25 mm		50 mm	
	Z axis (detector)	800 μm, 80 μm, 8 μm Up to 2,400 μm when using an optional stylus.			
Detector	Detection method	Differential inductance			
	Resolution	0.01 μm (800 μm range), 0.001 μm (80 μm range), 0.0001 μm (8 μm range)			
	Stylus tip shape (Angle/Radius)	60°/2 μm	90°/5 μm	60°/2 μm	90°/5 μm
	Measuring force	0.75 mN	4 mN	0.75 mN	4 mN
	Radius of skid curvature	40 mm			
	Measuring methods	Skidless/Skidded (switchable)			
Drive unit (X axis)	Measuring speed	0.05, 0.1, 0.2, 0.5, 1.0 mm/s			
	Drive speed	0.5, 1, 2, 5 mm/s			
	Straightness	0.3 μm/25 mm		0.5 μm/50 mm	
Up/down inclination unit	Vertical travel	10 mm			
	Inclination adjustment angle	±1.5°			
Applicable standards		JIS 1982/JIS 1994/JIS 2001/ISO 1997/ANSI/VDA			
Parameter		Ra, Rq, Rz, Ry, Rp, Rt, R3z, Rsk, Rku, Rc, RPC, RSm, Rmax ^{*1} , Rz1max ^{*2} , S, HSC, RzJIS ^{*3} , Rppi, RΔa, RΔq, Rlr, Rmr, Rmr (c), Rσc, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo, λa, λq, Lo, Rpm, tp ^{*4} , Htp ^{*4} , R, Rx, AR, W, AW, Wx, Wte Customizable			
Filtered profile		Primary profile, Roughness profile, DF profile, Waviness profile, Roughness motif profile, Waviness motif profile			
Analysis graph		Material ratio curve, Profile height amplitude distribution curve			
Data compensation functions		Parabola, Hyperbola, Ellipse, Circle, Tilt, No compensation			
Filter		2CR, PC75, Gaussian			
Cutoff value	λc	0.08, 0.25, 0.8, 2.5, 8 mm			
	λs ^{*5}	2.5, 8, 25 μm			
Sampling length		0.08, 0.25, 0.8, 2.5, 8, 25 mm			
Number of intervals		×1, ×2, ×3, ×4, ×5, ×6, ×7, ×8, ×9, ×10, ×11, ×12, ×13, ×14, ×15, ×16, ×17, ×18, ×19, ×20			
Arbitrary length		0.1 to 25 mm		0.1 to 50 mm	
Calculation display unit	Customization	Selection of display/evaluation roughness parameter			
	Simplified contour analysis function	Step, Step quantity, Area, Coordinate difference			
	DAT (Digimatic Adjustment Table) function	Helps to level workpiece prior to skidless measurement			
	Real sampling function	Inputs the displacement of the detector while stopping the drive unit			
	statistical processing	Calculates the maximum value, minimum value, average value, standard deviation, pass rate and histogram for each parameter.			
	Judgment ^{*6}	Maximum value rule, 16 % rule, mean value rule, standard deviation (1σ, 2σ, 3σ)			
	Storing measurement condition	Max. 10 (calculation display unit)			
	Print function (Built-in thermal printer)	Measurement condition/Calculation result/Judgment result/Calculation result per segment/Tolerance value/Evaluation curve/Graphic curve/ Material ratio curve/Profile height amplitude distribution curve/Environmental setting items/Statistical result (Histogram)			
	Display language	16 languages (Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Chinese (simplified/traditional), Czech, Polish, Hungarian, Turkish, Swedish, Dutch)			
	Storage function	Built-in memory: Measurement condition (Up to 10) Memory card (optional): 500 measurement conditions, 10000 measured profiles, 500 display images, 10000 text files, 500 statistical data, 1 backup file of device setting data, 10 data of Trace 10			
	External I/O functions	USB I/F, Digimatic output, RS-232C I/F, Foot switch I/F			
	Power supply	Battery	Built-in battery (rechargeable Ni-MH battery) /AC adapter		
Charging time/Endurance		Charging time of the built-in battery: about 4 hours (may vary due to ambient temperature) Endurance: about 1000 measurements (differs slightly due to use conditions/environment)			
Max. power consumption		50 W			
External dimensions (W×D×H)	Calculation display unit	275×198×109 mm			
	Up/down inclination unit	130.9×63×99 mm			
	Drive unit	128×35.8×46.6 mm		154.5×35.8×46.6 mm	
Mass	Calculation display unit	1.7 kg			
	Up/down inclination unit	0.4 kg			
	Drive unit	0.6 kg		0.64 kg	
Standard Accessories		Detector ^{*7} /Standard stylus ^{*8} 178-601 Roughness specimen (Ra3 μm) 270732 Receipt paper (Standard type: 5-roll set) 12BAL402 Protective sheet for the LCD (×1 sheet) 12BAG834 Touch pen 12AAN041 Carrying case		AC adapter, Power cable, Flat-blade screwdriver, Phillips screwdriver, Hex wrench, Strap for the touch pen, Operation manual, One-sheet manual, Warranty card	

*1 Calculation is available only when selecting the VDA, ANSI, or JIS 1982 standards.

*2 Calculation is available only when selecting the ISO 1997 standard.

*3 Calculation is available only when selecting the JIS 2001 standard.

*4 Calculation is available only when selecting the ANSI standard.

*5 Not available when selecting the JIS 1982 standard.

*6 Only the mean value rule is available for the ANSI standard. 16 % rule is not available when selecting the VDA standard.

*7 Depending on the Code No. of the **SJ-410** Series main unit, **178-396** or **178-397** is provided as standard.


*8 Standard stylus (**12AAC731** or **12AAB403**) supporting the provided detector is provided as standard.

Note 1: Refer to pages 12 to 13 for details of Detector, Stylus and Nosepiece.

Note 2: To denote your AC line voltage add the following suffixes (e.g. **178-580-11A**). A for 120 V, C for 100 V, D for 230 V, E for 230 V (for UK), DC for 220 V (for China), K for 220 V (for Korea)

Dimensions

Unit: mm

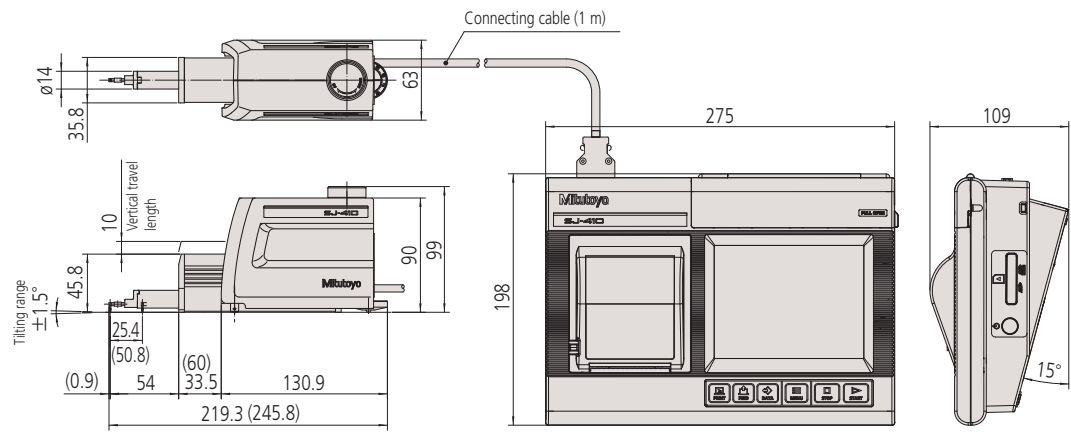


Note: Dimensions in parentheses indicate those of SJ-412 [equipped with a 50 mm drive unit].

Example of mounting on simple column stand. (178-039)*1

Unit: mm

*1 For details see page 5.

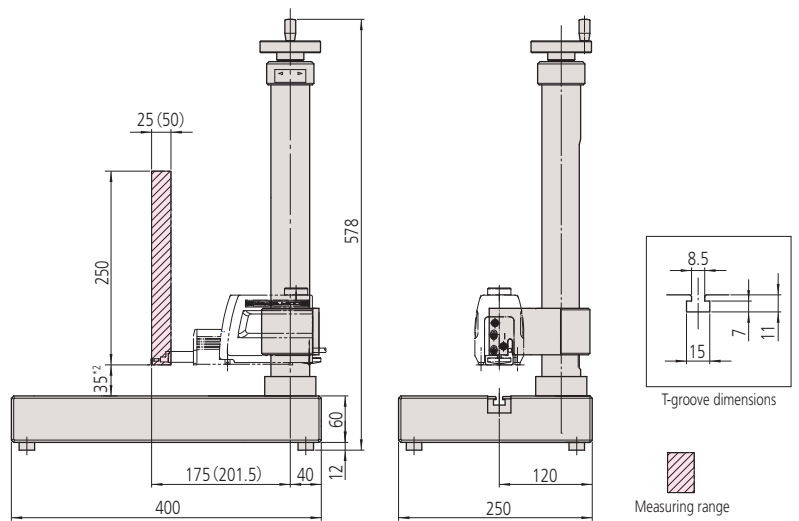

*2 This is the lowest position of the standard stylus mounted on the simple column stand. Since it is 35 mm from the base top, a block of suitable height is required for calibration with a roughness specimen. Use the stand in combination with optional accessories such as a leveling table (178-016) or an XY leveling table (178-024).
Note: The dimensions in parentheses indicate those for SJ-412



Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Notes on Export Regulations:

Do not commit an act, which could directly or indirectly, violate any law or regulation of Japan, your country or any other international treaty, relating to the export or re-export of any commodities.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.
All product information contained in this brochure is current as of Oct. 2024.



Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N
24 Kallang Avenue, Mitutoyo Building, Singapore 339415
Tel: (65) 6294 2211 Fax: (65) 6299 6666
E-mail: mapsg@mitutoyo.com.sg



www.mitutoyo.com.sg | www.mitutoyo.com.my
www.mitutoyo.co.th | www.mitutoyo.co.id
www.mitutoyo.com.vn | www.mitutoyo.com.ph

Mitutoyo (Malaysia) Sdn. Bhd.
Mah Sing Integrated Industrial Park,
4, Jalan Utarid U5/14, Section U5,
40150 Shah Alam, Selangor, Malaysia
Tel: (60) 3-7845 9318
Fax: (60) 3-7845 9346
E-mail: mmsb@mitutoyo.com.my
Penang Branch
Tel: (60) 4-641 1998
Fax: (60) 4-641 2998
Johor Branch
Tel: (60) 7-352 1626
Fax: (60) 7-352 1628

Mitutoyo (Thailand) Co., Ltd.
2327, Onnut Road, Kwaeng Onnut,
Khet Suanluang,
Bangkok 10250, Thailand
Tel: (66) 2080 3500
Fax: (66) 2521 6136
E-mail: office@mitutoyo.co.th
Chonburi Branch
Tel: (66) 2080 3563
Fax: (66) 3834 5788
ACC Branch
Tel: (66) 2080 3565

PT. Mitutoyo Indonesia
Jalan Sriwijaya No.26
Desa cibatu
Kec. Cikarang Selatan
Kab. Bekasi 17530, Indonesia
Tel: (62) 21-2962 8600
Fax: (62) 21-2962 8604
E-mail: ptmi@mitutoyo.co.id
Batam Branch
Tel: (62) 778 488 8000

Mitutoyo Vietnam Co., Ltd.
1st & 2nd Floor, MHD Building,
No. 60 Hoang Quoc Viet Road,
Nghia Do Ward, Cau Giay District,
Hanoi, Vietnam
Tel: (84) 24-3768 8963
Fax: (84) 24-3768 8960
E-mail: mvc@mitutoyo.com.vn
Ho Chi Minh City Branch
Tel: (84) 28-3840 3489
Hai Phong Branch
Tel: (84) 22-5398 9909

Mitutoyo Philippines, Inc.
Unit 1B & 2B LTI,
Administration Building 1,
Annex 1, North Main Avenue,
Laguna Technopark, Biñan,
Laguna 4024, Philippines
Tel: (63) 49-544 0272
Fax: (63) 49-544 0272
E-mail: mpi@mitutoyo.com.ph