

Mitutoyo

Mitutoyo Quality

Compact Roundness Measurement ROUNDTTEST RA-120/120P

Form Measurement



Roundtest RA-120

This compact roundness measuring machine is provided with numerous user-friendly features aimed at prioritizing usability, such as a wider range for the detector, an easy-to-understand operation panel with large LCD, a D.A.T. function that powerfully supports centering and leveling adjustments, and so on.

- Best-in-class rotational accuracy in compact type roundness measuring instruments
- Fine adjustment on both X- and Z-axes
- Multiple analyses through simple operation
- D.A.T. function^{*1}
- Scaled Z-axis^{*1}
- Continuous ID and OD measurement^{*1}
- High-precision air bearing
- Wide-range detector^{*2}
- Registration and calling of measurement results/conditions
- Built-in printer
- Supports 16 languages

*1: Refer to P.6

*2: Refer to P.7



Simple, interactive display screen

The large LCD screen with backlight shows easy-to-understand measurement results and graphs. Forms can be checked and notch processing can be set while observing the displayed graphs.

Measurement screen	Measurement results
<ul style="list-style-type: none"> • Set the position of the detector and measurement conditions here • During measurement, graphs are displayed in real time 	<ul style="list-style-type: none"> • Filter, display magnification, etc., can be altered • Besides circles, development views can also be displayed
<p>▲ Measurement screen</p> <p>▲ Measurement in progress screen</p>	<p>Result screen ▲</p>

Operating panel that is read at a glance

Supports 16 languages

Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Traditional Chinese, Simplified Chinese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch

Analysis type

Selection buttons provide access to a wide variety of analysis types

Switching screen modes

Switch the display at the touch of a button, providing access to the [Calibration], [Centering and Leveling], [Measurement], and [Result] screens.

Zero-setting button

No fine adjustment necessary for setting the measurement position



Simple setup

Apply the current measurement setup in one go
Simple operation helps prevent operational errors

Jog dial


Make detailed changes to setup and other operations

Simplified communication program for ROUNDTEST RA-120

The Roundtest RA-120 has a USB interface, enabling data to be transferred to a spreadsheet or other software.

Notch processing

Unwanted data, such as that produced by notches or scratches, can be excluded from the analysis if desired. Select between [Automatic setting] and [Arbitrary setting].

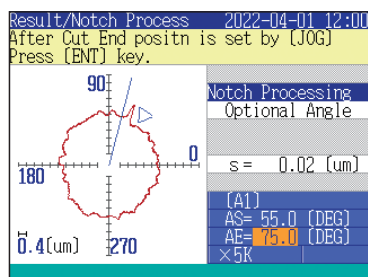

File save


Save and access [Measurement files] and [Result files] in USB memory. Data can also be totaled using the data output function with commercial tabulation software.

[Measurement file] [Measurement data (Data output)]
[Result file] [Result data (Data output)]

High-grade thermal printer

Print measurement conditions, computation results, result graphs, comments, etc., to the thermal printer. Change development graphs and output items as desired.

Sample prints

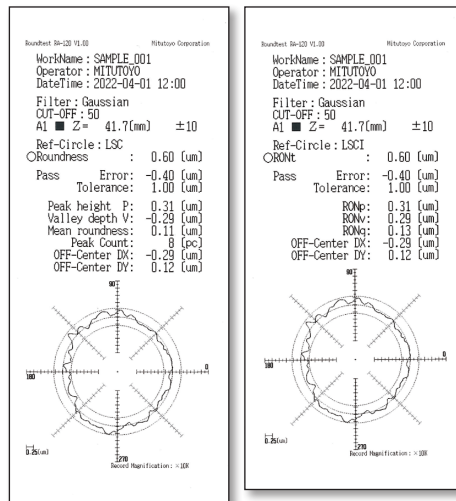

Recording paper set (optional set of 10 rolls)

Roundtest RA-120P

This entry-level desktop tester incorporates the ROUNDPAK multi-analysis evaluation program, which provides it with analytical power close to that of more elaborate models. This is, therefore, a highly functional multi-analysis roundness measuring machine that is suitable for use not only in measurement rooms, but also in research and development sections.

- Best-in-class rotational accuracy in the Compact Type Roundness Measuring Instruments
- Fine adjustment on both X- and Z-axes
- Multiple analyses through simple operation
- D.A.T. function*¹
- Scaled Z-axis*¹
- Continuous ID and OD measurement*¹
- Display function for various graphs
- High-precision air bearing
- Wide-range detector*²
- Supports 18 languages


*1: Refer to P.6

*2: Refer to P.7




Windows graphical interface


By using a mouse and buttons, identified by corresponding icons, to control the machine, the Roundtest RA-120P's interface provides excellent usability. Functions such as recalculation and graph reading are handled swiftly with easy-to-understand operations.

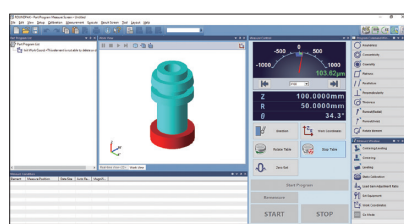


▲ Main screen

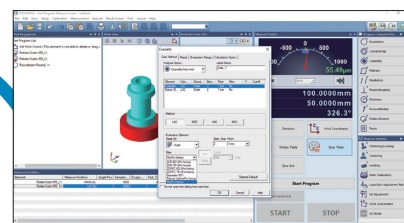

▲ Measurement setup screen

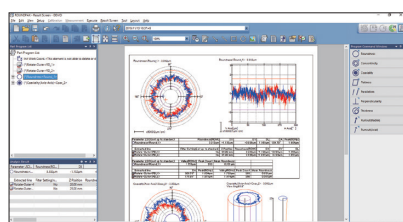


▲ Result screen

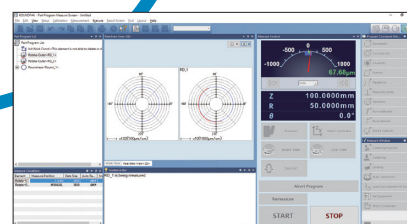

▲ Measurement in progress screen


This entry-level desktop tester incorporates the ROUNDPAK multi-analysis evaluation program, which provides it with analytical power close to that of more elaborate models. This is, therefore, a highly functional multi-analysis roundness measuring machine that is suitable for use not only in measurement rooms, but also in research and development sections.

Measurement screen makes ample use of graphs

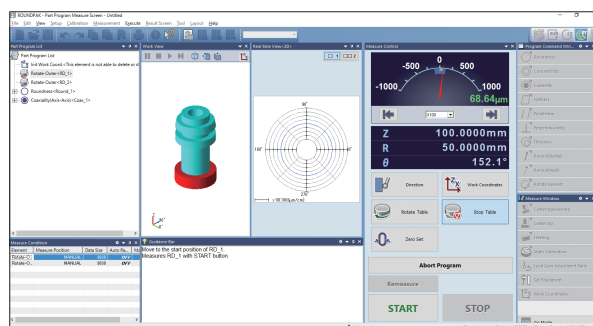


Multi-analysis function

Complete with a wide range of functions including partial enlargement, auxiliary line setup, color change, displacement/angular difference of data between two points, and so on. Also equipped with notch processing and graph reading functions, which make the machine useful in research departments. Recalculation can also be performed with the filter and evaluation method changed.

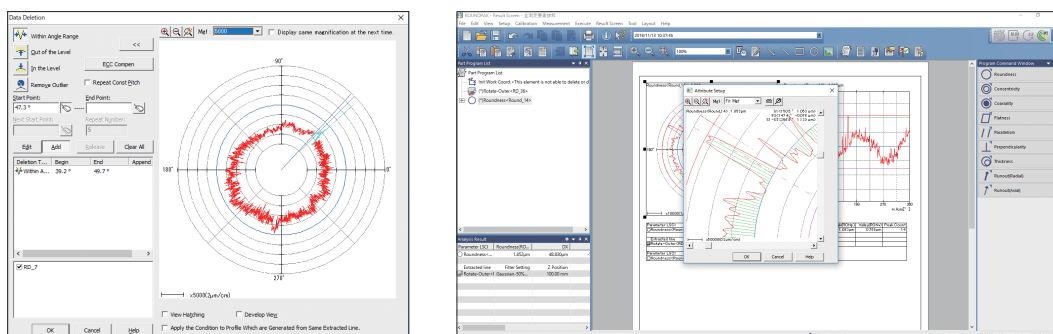


Simplified layout function

Computation results for multiple items can be laid out in multiple forms on a single sheet and printed. This function also supports output to a color printer (optional).

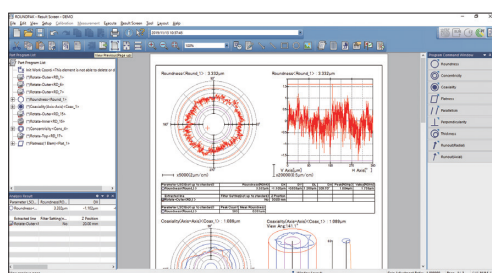

■ Layout setting screen


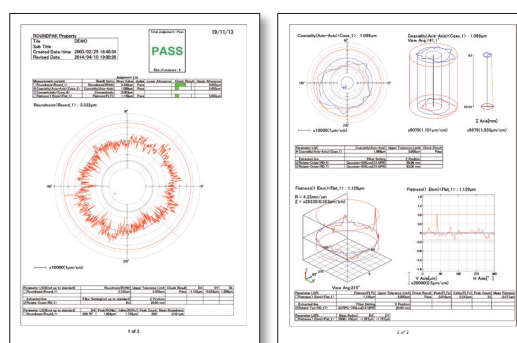


■ Sample print outputs

Functions that implement greater efficiency of measurement and range of analysis types

D.A.T. function *except for centering/leveling device (analog micrometer heads)

This instrument uses the D.A.T. (Digital Adjustment Table) function available on more sophisticated models, and this provides powerful support for centering and leveling operations. To perform such operations, the user need only adjust the digital micrometer heads attached to the rotary table by the amounts indicated by the display. This function also supports measurement of notched workpieces.

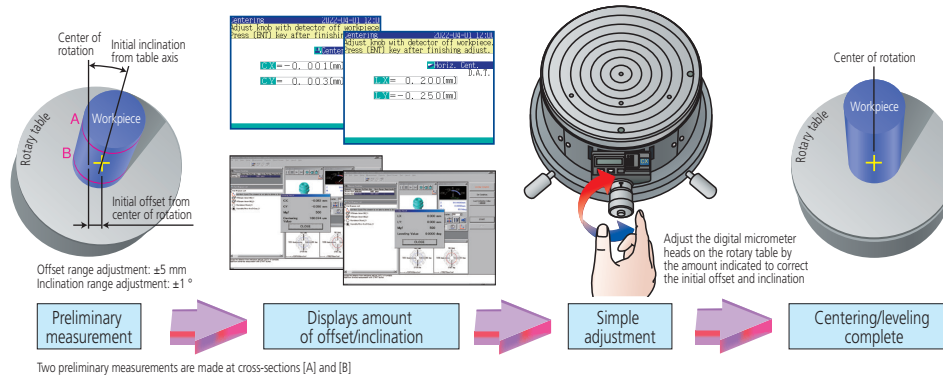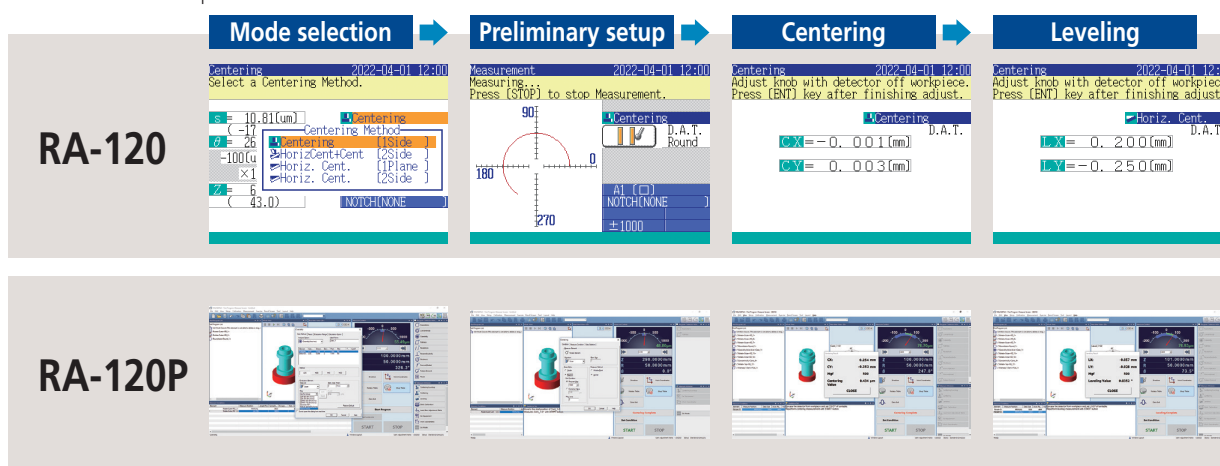

Continuous ID and OD measuring function

This function comes in very handy when outside diameter and inside diameter surfaces need to be measured repeatedly, for example, with respect to coaxiality, deviation in wall thickness, etc. The inner surface can be measured and evaluated with the detector, maintaining the same measuring position for the outside diameter without changing its orientation, as illustrated on the right. Inside diameters down to 50 mm can be measured.



Continuous inside and outside diameter function (inside dia. surface)



Continuous inside and outside diameter function (outside dia. surface)


Z-axis scale

This scale is useful when the measuring height position needs to be entered, such as when measuring coaxiality, etc. The machine uses an ABS Digimatic scale unit to provide an effective means for repetitive measurement and position setting.



IN/OUT switchable wide-range detector

The range of this detector has been extended from that of a conventional lever head by as much as four times, and is now wider than ever before. The detector can provide sufficient margin for centering and leveling jobs, or when measuring large differences. Moreover, the measuring direction can be switched between inside and outside diameters with a single touch of a button.

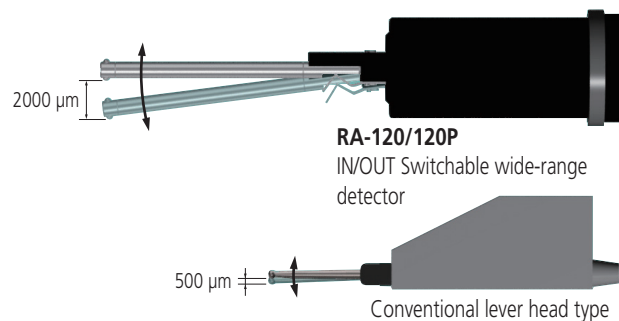

















Types of Analysis

Type of Analysis	Measurement mode	Evaluation diagram	RA-120	RA-120P	Type of Analysis	Measurement mode	Evaluation diagram	RA-120	RA-120P
Roundness			✓	✓	Parallelism			✓	✓
Flatness			✓	✓	Thickness variation	Radial		✓	✓
Squareness	Relative to Axis		✓	✓	Circular run-out	Axial		✓	✓
	Relative to Plane		✓	✓	Radial			✓	✓
Concentricity			✓	✓	Axial			✓	✓
Coaxality	Of section		✓	✓	Power spectrum			—	✓
	Of axis		—	✓	Profile operation	—		—	✓

Optional Accessories

Interchangeable Styli

Unit: mm

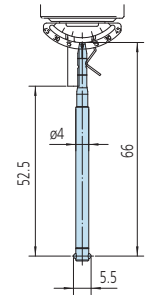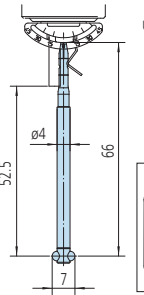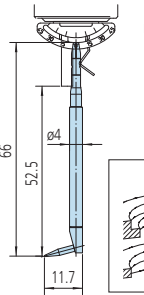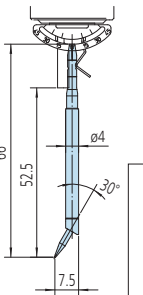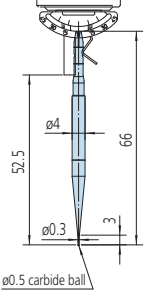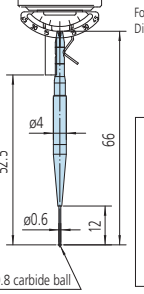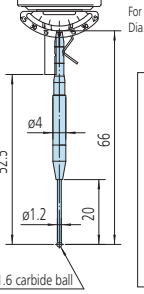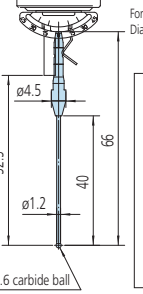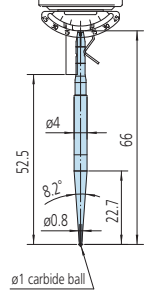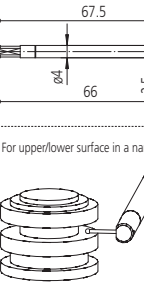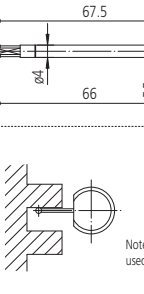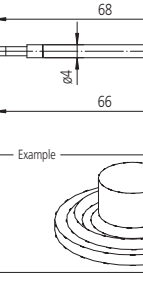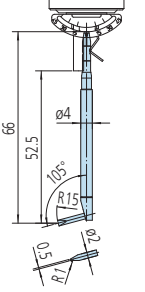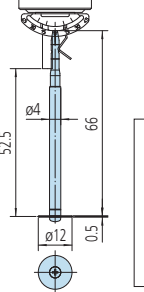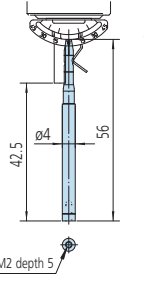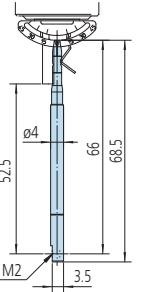12AAL021 Standard stylus *Standard accessory (stylus tip: $\phi 1.6$ carbide ball)	12AAL022 Stylus for notched workpieces (stylus tip: $\phi 3$ carbide ball)	12AAL023 Stylus for grooves (stylus tip: R0.25 sapphire)	12AAL024 Stylus for corners (stylus tip: R0.25 sapphire)
 <p>For standard applications</p> <p>In ID measurement Dia.: ≥ 7.5 mm, Depth: ≤ 50 mm</p>	 <p>Useful for notched workpieces</p> <p>Example</p>	 <p>For stepped applications</p> <p>Example</p>	 <p>For inside-corner applications</p> <p>Example</p>
12AAL029 Stylus for extra small holes (stylus tip: $\phi 0.5$ carbide ball)	12AAL026 Stylus for small holes (stylus tip: $\phi 0.8$ carbide ball)	12AAL030 Stylus for small and deep holes (stylus tip: $\phi 1.6$ carbide ball)	12AAL028 Stylus for small and deep holes (stylus tip: $\phi 1.6$ carbide ball, L=40)
 <p>For extra small hole applications Dia.: ≥ 1 mm, Depth: ≤ 2.5 mm</p> <p>Enlarged image</p> <p>$\phi 0.5$ carbide ball</p>	 <p>For small hole applications Dia.: ≥ 1.5 mm, Depth: ≤ 10 mm</p> <p>Enlarged image</p> <p>$\phi 0.8$ carbide ball</p>	 <p>For small and deep hole applications Dia.: ≥ 3 mm, Depth: ≤ 18 mm</p> <p>Enlarged image</p> <p>$\phi 1.6$ carbide ball</p>	 <p>For small and deep hole applications Dia.: ≥ 3 mm, Depth: ≤ 38 mm</p> <p>Enlarged image</p> <p>$\phi 1.6$ carbide ball</p>
12AAL027 Stylus for small holes (stylus tip: $\phi 1$ carbide ball)	12AAL032 Cranked stylus (stylus tip: $\phi 0.5$ carbide ball)	12AAL033 Cranked stylus (stylus tip: $\phi 1$ carbide ball)	12AAL034 Stylus for flat surface
 <p>For small hole applications</p> <p>Example</p> <p>$\phi 1$ carbide ball</p>	 <p>For upper/lower surface in a narrow groove</p> <p>Note: This stylus cannot be used for OD/ID measurement.</p>	 <p>For upper/lower surface in a narrow groove</p> <p>Note: This stylus cannot be used for OD/ID measurement.</p>	 <p>Example</p>
12AAL025 Stylus for filtering asperities (machining marks)	12AAL031 Disk stylus	12AAL043 M2 tapped shank for CMM styli	12AAL044 M2 tapped shank for CMM styli
 <p>Filtering out the effects of asperities by tracing with R15 tipped stylus</p> <p>Example</p> <p>Machining marks</p>	 <p>Example</p> <p>For narrow groove applications</p>	 <p>Compatible with CMM styli with M2 threaded shank</p> <p>M2 depth 5</p>	 <p>Compatible with CMM styli with M2 threaded shank</p>

* portion shows stylus except for the cranked stylus and stylus for flat surface.

*Customized special interchangeable styli are available on request. Please contact any Mitutoyo office for more information.

Centering chuck (knurled ring operated)

Provides good operability when measuring a small-diameter workpiece. The knurled ring allows the workpiece to be clamped easily.



Order No.	211-032
Holding range	OD with inner jaw: $\phi 1 - 36$ mm ID with inner jaw $\phi 16 - 69$ mm OD with outer jaw: $\phi 25 - 79$ mm
External size (D x H)	$\phi 118 \times 41$ mm
Mass	1.2 kg

Collet chuck

Provides high clamping repeatability due to the use of optional precision collets. (See table at right.)



Order No.	211-061
Part holding range	OD $\phi 0.5 - 10$ mm*2
Centering error	Within $50 \mu\text{m}$ *3
Mass	1.4 kg

*2: Collets to match the workpiece size range are required for use with this chuck.

*3: When measured with $\phi 5$ mm pin gauge at measuring height of 30 mm.

X-axis stop


Allows the user to return the detector rapidly and easily to a fixed position in the X axis.



Order No.	12AAH320
Mass	65 g

Three-jaw chuck (key operated)

Useful where it is necessary to apply a higher clamping force to the workpiece than can be applied with the centering chuck.



Order No.	211-014
Holding range	OD with outer jaw: $\phi 2 - 35$ mm ID with inner jaw: $\phi 25 - 68$ mm OD with outer jaw: $\phi 35 - 78$ mm
External size (D x H)	$\phi 157 \times 70.6$ mm
Mass	3.8 kg


Individual collets*4

These collets are for use with the collet chuck shown at left and are acquired to match the workpiece diameter range required.

Order No.	Part Holding Range
12AAH402	$\phi 0.5 - 1.0$ mm
12AAH403	$\phi 1.0 - 1.5$ mm
12AAH404	$\phi 1.5 - 2.0$ mm
12AAH405	$\phi 2.0 - 2.5$ mm
12AAH406	$\phi 2.5 - 3.0$ mm
12AAH407	$\phi 3.0 - 3.5$ mm
12AAH408	$\phi 3.5 - 4.0$ mm
12AAH409	$\phi 4.0 - 5.0$ mm
12AAH410	$\phi 5.0 - 6.0$ mm
12AAH411	$\phi 6.0 - 7.0$ mm
12AAH412	$\phi 7.0 - 8.0$ mm
12AAH413	$\phi 8.0 - 9.0$ mm
12AAH414	$\phi 9.0 - 10.0$ mm

*4: A collet cannot be mounted on the rotary table without a collet chuck.
*4: YCC10-** Class AA, made by Yukiwa Seiko Inc. or its equivalent.

Vibration-damping stand

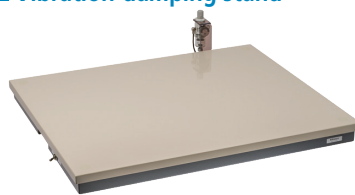

Order No.	211-013
Vibration damping system	Diaphragm type air spring
External size	$615 \times 515 \times 51$ mm
Max. loading mass	150 kg

Microchuck

For clamping a small workpiece, 1 mm or less in diameter, that cannot be held in the centering chuck.



Order No.	211-031
Holding range	OD: $\phi 0.2 - \phi 1.5$ mm
External size (D x H)	$\phi 107 \times 48.5$ mm
Mass	0.6 kg

Auxiliary stage for a short workpiece

356038



Reference hemisphere

211-016




Magnification checking gage

211-045



Gage block set for calibration

997090



Printer paper 10 roll/set

12AAH181



Replacement elements for the air filter

358592 (for filter)

358593 (filter regulator)

Simplified communication program for ROUNDTST RA-120

The Roundtest RA-120 has a USB interface, enabling data to be transferred to a spreadsheet or other software. We also provide a program that lets you create inspection record tables using a Microsoft Excel* macro.



Required environment:

- OS: Windows XP-SP3
Windows VISTA
Windows 7 (32bit/64bit)
Windows 10
- Spreadsheet software: Microsoft Excel 2010
Microsoft Excel 2016

*Windows OS and Microsoft Excel are products of Microsoft Corporation.

The optional USB cable is also required.

- USB cable for RA-120 series
12AAH490

This program can be downloaded for FREE from the Mitutoyo website.
<https://www.mitutoyo.co.jp/eng/>


Specifications

■ Main unit


Model			RA-120			RA-120P		
			Dedicated electronic analysis type			Data analysis by PC		
Turntable	Rotational accuracy	Radial	(0.04+6 H/10000) μm H: Probing height (mm) JISB7451-1997					
		Axial	(0.04+6X/10000) μm X: Distance from the center of rotation (mm)					
	Rotational speed		6 rpm					
	Table diameter		150 mm					
	Centering range adjustment		±3 mm					
	Leveling range adjustment		±1 °					
	Centering/leveling device (micrometer head)		Analog head	Digital head (mm)	Digital head (inch/mm)	Analog head	Digital head (mm)	Digital head (inch/mm)
	Maximum probing diameter		280 mm (380 mm in a reverse and vertical detector position)					
	Maximum workpiece diameter		440 mm					
	Maximum turntable loading		25 kg					
Vertical column (Z axis)	Vertical travel		280 mm from the turntable top					
	Maximum probing height		280 mm from the turntable top (480 mm in the reverse and vertical detector configuration)					
	Maximum probing depth		100 mm (minimum ID: 30 mm)					
Horizontal arm (X axis)	Horizontal travel		165 mm (Including a protrusion of 25 mm from the turntable rotation center)					
Detector	Measuring direction		Two directional (IN/OUT switchable)					
	Measuring range		±1000 μm					
	Measuring force		70 to 100 mN (±30 %)					
	Standard stylus (12AAL021)		Carbide ball, ø1.6 mm (.06 ")					
Electronic unit	Measuring range		8 steps: ±(1000, 500, 200, 100, 50, 20, 10, 5) μm					
	Magnification		X5 to X200,000			X1 to X500,000		
	Filter type		Phase corrected: Gaussian, 2CRPC75, 2CRPC50			Not phase corrected: 2CR75, 2CR50 Filter OFF		
	Cutoff value		15 upr, 50 upr, 150 upr, 500 upr 15-150 upr, 15-500 upr, 50-500 upr			15 upr, 50 upr, 150 upr, 500 upr, Manual 15-150 upr, 15-500 upr, 50-500 upr, Manual		
	Number of measuring sections		Maximum 5			Maximum 100		
	Evaluation type		Roundness, coaxality, concentricity, flatness, circular run-out (radial/axial), squareness (relative to axis/plane), thickness deviation, parallelism					
	Reference circle for evaluation		LSC, MZC, MIC, MCC					
	Adjusting centering/leveling		DAT function (circular/multi-point switchable)					
	Functions		Notched measurement, re-calculation, limaçon error correction, continous ID and OD measurement			Notched measurement, re-calculation, limaçon error correction, remarkable point analysis (gear), harmonic analysis, continous ID and OD measurement		
	Printer		Built-in thermal line printer, optional external printer			Windows compatible ink-jet printer		
	Display languages		Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Traditional Chinese, Simplified Chinese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch			Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Traditional Chinese, Simplified Chinese, Czech, Polish, Hungarian, Turkish, Swedish, Russian, Dutch, Thai		
	Data output	USB	Calculation result, measurement data					
		RS-232C	Calculation result, measurement data					
		SPC	Calculation result					
Others	Power supply		AC 100 – 240 V					
	Power consumption		32 – 36 W			21 – 24 W (excluding PC system)		
	Air pressure		0.39 MPa					
	Air consumption		30 L/min (minimum)					
	Mass		Main unit: 32 kg Air filter: 2 kg					

Dimensions


External dimensions

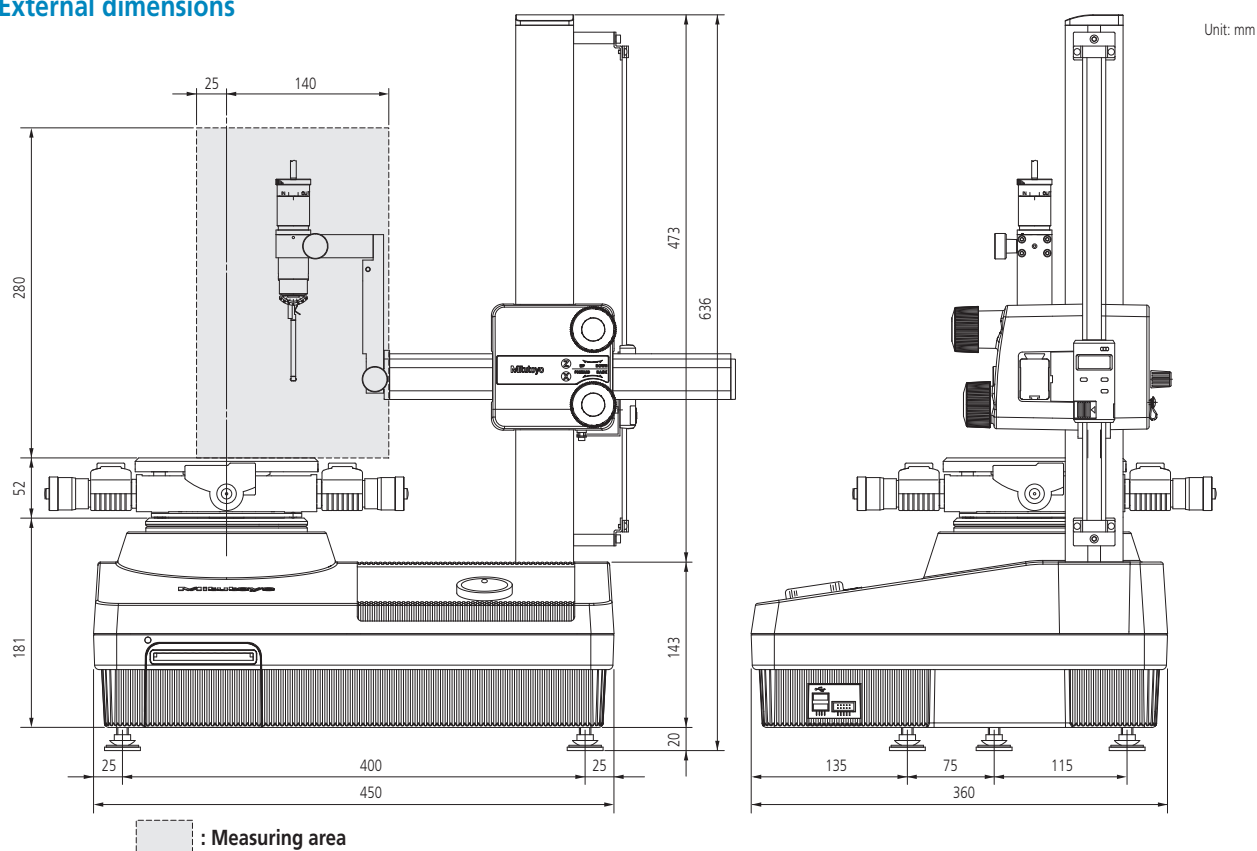


Turntable top view

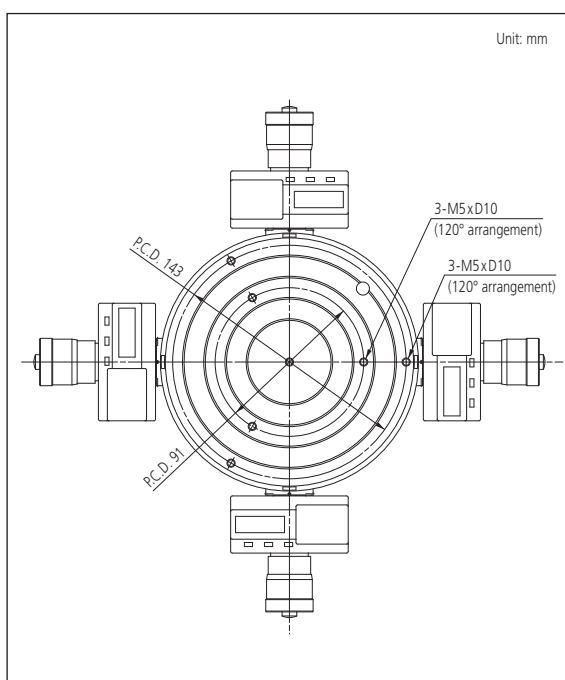

Installation floor plan

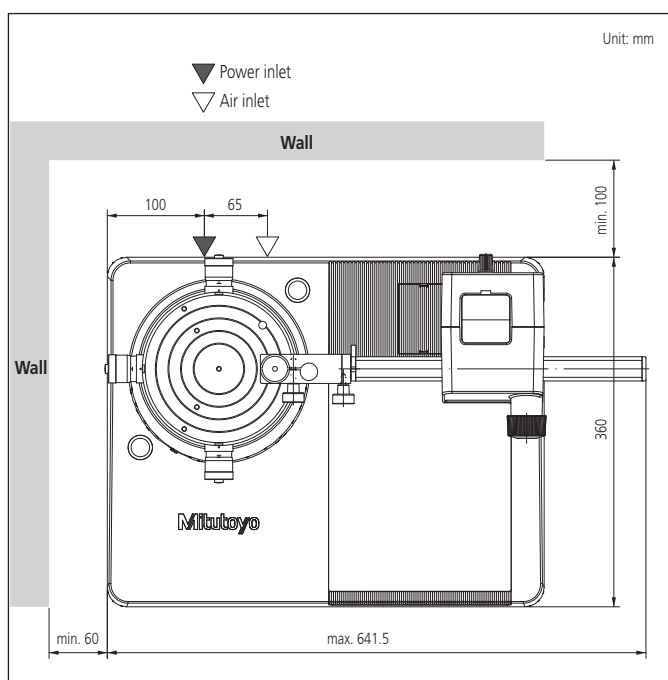



Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.
MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.
All product information contained in this brochure is current as of September 2023.



Mitutoyo Asia Pacific Pte. Ltd.
Company Reg No. 197800892N
24 Kallang Avenue, Mitutoyo Building, Singapore 339415
Tel: (65) 6294 2211 Fax: (65) 6299 6666
E-mail: mapsg@mitutoyo.com.sg

www.mitutoyo.com.sg | www.mitutoyo.com.my
www.mitutoyo.co.th | www.mitutoyo.co.id
www.mitutoyo.com.vn | www.mitutoyo.com.ph

Mitutoyo (Malaysia) Sdn. Bhd.
Mah Sing Integrated Industrial Park,
4, Jalan Utarid U5/14, Section U5,
40150 Shah Alam, Selangor, Malaysia
Tel: (60) 3-7845 9318
Fax: (60) 3-7845 9346
E-mail: mmsb@mitutoyo.com.my
Penang Branch
Tel: (60) 4-641 1998
Fax: (60) 4-641 2998
Johor Branch
Tel: (60) 7-352 1626
Fax: (60) 7-352 1628

Mitutoyo (Thailand) Co., Ltd.
2327, Onnut Road, Kwaeng Onnut,
Khet Suanluang,
Bangkok 10250, Thailand
Tel: (66) 2080 3500
Fax: (66) 2521 6136
E-mail: office@mitutoyo.co.th
Chonburi Branch
Tel: (66) 2080 3563
Fax: (66) 3834 5788
ACC Branch
Tel: (66) 2080 3565

PT. Mitutoyo Indonesia
Jalan Sriwijaya No.26
Desa cibatu
Kec. Cikarang Selatan
Kab. Bekasi 17530, Indonesia
Tel: (62) 21-2962 8600
Fax: (62) 21-2962 8604
E-mail: ptmi@mitutoyo.co.id
Batam Branch
Tel: (62) 778 488 8000

Mitutoyo Vietnam Co., Ltd.
1st & 2nd Floor, MHDI Building,
No. 60 Hoang Quoc Viet Road,
Nghia Do Ward, Cau Giay District,
Hanoi, Vietnam
Tel: (84) 24-3768 8963
Fax: (84) 24-3768 8960
E-mail: mvc@mitutoyo.com.vn
Ho Chi Minh City Branch
Tel: (84) 28-3840 3489
Hai Phong Branch
Tel: (84)22-5398 9909

Mitutoyo Philippines, Inc.
Unit 1B & 2B LTI,
Administration Building 1,
Annex 1, North Main Avenue,
Laguna Technopark, Biñan,
Laguna 4024, Philippines
Tel: (63) 49-544 0272
Fax: (63) 49-544 0272
E-mail: mpi@mitutoyo.com.ph

